


KRONOS 3/3_3/1 Series Three Phase On-Line UPS

10KVA ~ 20KVA

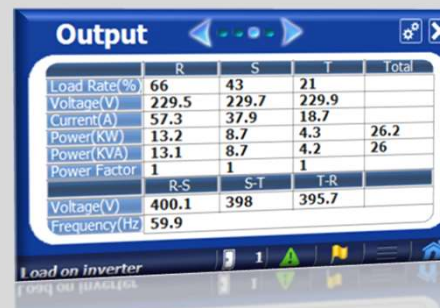

- Convertable 3/3 UPS and 3/1 UPS
- The Smallest Footprint
- High Input Power Factor >0.99
- Power Scalable and Parallel Redundancy
- Built-in High Current Battery Charger
- Available for internal battery up to 40 blocks
- Wide Range and Flexible Battery Configuration
- Standard Separate or Common Batteries for Parallel Systems
- Available DC Start Function
- Strong Over Load Capacity
- Advanced Operation Interface -- Colorful LCD Touch Screen

Output

	R	S	T	Total
Load Rate(%)	66	43	21	
Voltage(V)	229.5	229.7	229.9	
Current(A)	57.3	37.9	18.7	
Power(KW)	13.2	8.7	4.3	26.2
Power(KVA)	13.1	8.7	4.2	26
Power Factor	1	1	1	
	R-S	S-T	T-R	
Voltage(V)	400.1	398	395.7	
Frequency(Hz)	59.9			

Load on inverter

Specifications

Capacity		10KVA		20KVA	
Input	Voltage	400V 3 Phase + N			
	Voltage Tolerance	±20% @100% load, -40% ~-20% @50% load			
	Frequency	40~70Hz			
	Power Factor	≥ 0.99			
	THDi	3/1	≤ 5% @100% load		
		3/3	≤ 3% @100% load		
Output	Voltage	3/1	220/230/240V 1 Phase + N		
		3/3	3/3 380/400/415V 3 Phase + N		
	Voltage Tolerance	±1% (Static Load)			
	Frequency	50/60Hz			
	Frequency Tolerance	0.05% (free running)			
	Power Factor	0.9			
	Crest Factor	3:1			
	Voltage Harmonic Distortion	<2% with linear load <5% with distorting load			
	Overload	110% for 60 minutes, 125% for 10 minutes, 150% for 1 minutes			
Bypass	Voltage	3/1	220/230/240V 1 Phase + N		
		3/3	380/400/415V 3 Phase + N		
	Voltage Tolerance	±5%~±30% (Programmable)			
	Frequency	50/60Hz			
	Frequency Tolerance	±1Hz/±3Hz (Selectable)			
Battery	Number of Batteries (Configurable)	3/1	±16~20pcs	±20pcs	
		3/3	±13~20pcs	±16~20pcs	
	Charging Current @ 100%load	3.5 A		7 A	
	Max. Charging Current	10 A		21 A	
	Common Battery for Parallel	Yes			
Internal Battery	Available for housing 12V 7/9AH x 40pcs				
Efficiency	VFI Mode	>93.5%		>94.5%	
	ECO Mode	>98%			
Function	DC Start	Yes			
	Parallel (Optional)	Up to 6 units			
Physical	Dimensions (W x D x H)	260 mm x 850 mm x 890 mm			
	Weight (w/o battery)	74 kg		76 kg	
	Protection Grade	IP20			
Interface	Display and MMI	4.3" Colorful LCD Touch Screen			
	Built-in Communication Port	USB, EPO, Dry Contact			
	Optional Communication	2 Communication Slots for SNMP Card, RS-485 Modbus Card, Dry Contact Card			
Environment	Operation Temperature	0~40°C			
	Operation Humidity	0~95% (without condensation)			
	Altitude	< 1000 m without derating			
	Nose Level (at 1 meter)	< 52dB		<52 dB	
Tested to Standard	Safety	LVD: EN62040-1			
	EMC	EN62040-2			
	Mark	CE			

Ablerex Electronics Co., Ltd.

1F, No.3, Ln. 7, Baogao Rd., Xindian Dist., New Taipei City 23144, Taiwan R.O.C.

Tel: +886-2-2917-6857 Fax:+886-2-2913-1705

http://www.ablerex.com.tw Email: ablerex@ablerex.com.tw

